



Prism Pro

Part of the Downlights product category



Model	Prism Pro CCT Fire Rated Gimbal Dual Wattage Satin Chrome
Code	APRIPG/1/SC
Application	Ancillary, Hospitality, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	5W - 7W
Operating Temp	-20°C - 35°C
Lumens Delivered	530lm - 690lm (4000K)
lm/W	100lm/W (4000K)
CCT	2700/3000/4000/6000K
UGR	28
Beam Angle	70

MATERIAL INFORMATION


Main Material	Aluminium
Diffuser Material	Polycarbonate
Product Weight without Packaging	0.285 kg
Colour / Finish	Satin Chrome
Diameter	86 mm
Height	67 mm

TECHNICAL INFORMATION

Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.85
L70 @ 25°C	L70 B50 60,000h

PRODUCT FEATURES

- 220-240V IP20 dimmable LED 4 CCT selectable fire rated performance gimbal suitable for residential and hospitality applications
- CCT selectable between 2700K, 3000K, 4000K and 6000K and power selectable; offering a choice of 2 outputs, in one luminaire
- 30° tilt angle
- New innovative 2 part detachable connector design allows initial wiring and testing to be completed first, then simply plug the downlight back to the connector, ensuring a quick and simple installation
- Remote driver with 2x1.5mm_L + CPC loop-in, loop-out colour coded push fit piano terminals provide an easy and efficient installation

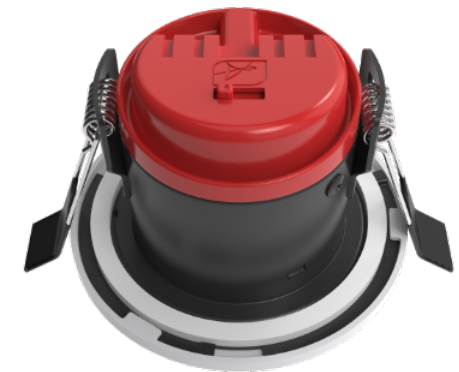



Prism Pro



Part of the Downlights product category

Model	Prism Pro CCT Fire Rated Gimbal Dual Wattage Satin Chrome
Code	APRIPG/1/SC
Application	Ancillary, Hospitality, Residential, Retail

