



Prism Pro

Part of the Downlights product category



Model	Prism Pro Mini CCT Anti Glare Fire Rated Dual Wattage
Code	APRIPMINIAG/1
Application	Ancillary, Hospitality, Residential, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	5W
Operating Temp	-5°C - 25°C
Lumens Delivered	280lm (4000k)
lm/W	60lm/W
CCT	2700/3000/4000/6000K
UGR	20
Beam Angle	55

MATERIAL INFORMATION


Main Material	Aluminium
Diffuser Material	PMMA
Product Weight without Packaging	0.177 kg
Colour / Finish	White
Diameter	55 mm
Height	63 mm

TECHNICAL INFORMATION

Class Protection	1
Light Source	LED
SDCM (Initial Macadam)	6
CRI	80
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.85
L70 @ 25°C	L70 B50 54,000h

PRODUCT FEATURES

- Miniature IP65 Fire rated architectural downlight suitable for residential and hospitality applications
- CCT selectable between 2700K, 3000K, 4000K and 6000K
- Ultra slim detachable driver with loop-in, loop-out push fit terminals provide an easy and efficient installation
- Can be used as the sole light source or as a complimentary product to Prism Pro / Prism Pro Anti-Glare
- Supplied with matt white bezel as standard. Chrome, satin chrome and matt black bezels sold separately

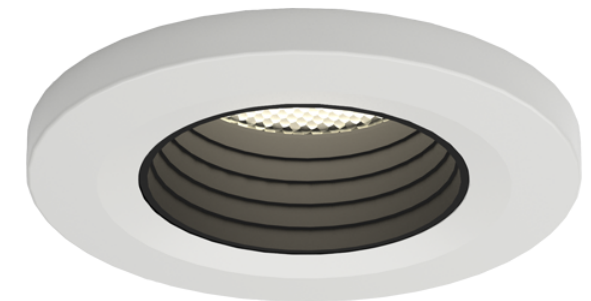



Prism Pro

Part of the Downlights product category



Model	Prism Pro Mini CCT Anti Glare Fire Rated Dual Wattage
Code	APRIPMINIAG/1
Application	Ancillary, Hospitality, Residential, Retail

